

EKSMAL-1

SAMORAZLIVAJUĆI CEMENTNI MALTER

(ZA ZALIVANJE ANKERA, LEŽIŠTA,
NOSAČA, OTVORA i dr.)




- LAKO UGRADLJIV
- VISOKE ČVRSTOČE
- JEDNOSTAVNO IZVOĐENJE
- JEDNOKOMPONENTAN

PRIMENA:


Eksmal -1 koristi se za zalivanje otvora, sanacije rupa u betonu, zalivanje ankera, podlivanje ležišta kranških greda, nosača, mašinskih ležišta.

SVAKODNEVNI PRIMERI:

Prodor kroz betonske ploče – sifon, odvod, toplovodne i vodovodne instalacije

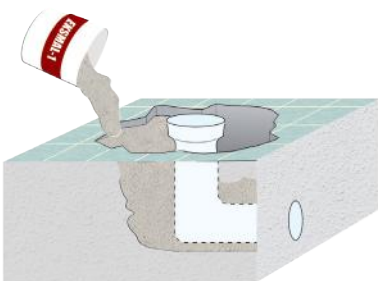

Fiksiranje (montaža) čeličnih ograda

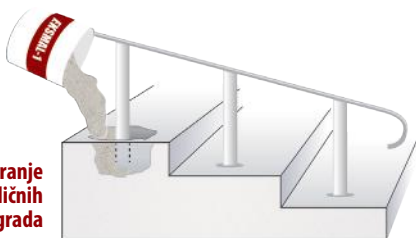

Metalne elemente u betonskoj podlozi



Početak očvršćavanja od tri do pet sati



Kraj očvršćavanja od četiri do šest sati



Čvrsto i trajno rešenje






Otporan na atmosferske uticaje

KARAKTERISTIKE:

- ◆ Samorazlivajući materijal
- ◆ Jednostavan i lako ugradljiv
- ◆ Odlična adhezija za podlogu
- ◆ Čvrstoća na pritisak: nakon 1 dan > 30 MPa
nakon 28 dana > 60 MPa
- ◆ Omogućuje ranu eksploataciju obrađenih površina
- ◆ Otporan na atmosferske uticaje
- ◆ Sadrži punila sa maksimalnom veličinom zrna do 1 mm

UGRAĐIVANJE:



Proces zalivanja ankera

Podlivanje ležišta treba da se vrši uz stalno dolivanje materijala sa jedne strane, kako se ne bi zarbio vazduh ispod ploče.



Pre zalivanja



Nakon zalivanja

Pri zalivanju ankera, otvor treba da ima dijаметar najmanje 6 mm širi od prečnika samog ankera.



POTROŠNJA:

Za 1 m³ ugrađeni EKSMAL-1, potrebno je od 2000 kg do 2200 kg materijala.



* Za dodatne informacije, potražite tehnički prospekt proizvoda na: www.ading.com.mk

PAKOVANJE:





25 kg



4 kg

PRIPREMA:



ADING AD Skopje, Novoselski Pat (ul. 1409) br. 11, 1060 Skopje, R. Makedonija;
Tel.: +389 / 02 2034 840; fax: +389 / 02 2034 850;
e-mail: ading@ading.com.mk
www.ading.com.mk