



ADINGFAVORIT

ACRYLIC SYSTEM FOR TENNIS COURTS

ADINGFAVORIT is an acrylic system for construction of tennis courts, categorized and certified in accordance with **ITF** (International Tennis Federation). This acrylic sports system has been continuously used for more than 20 years and it has proven to be long-lasting and a high-quality solution for indoor and outdoor tennis courts whilst it is also easy to maintain and clean. Furthermore, tennis courts made with **ADINGFAVORIT** can be used even when the ground is wet. The constant product improvements and the innovations by our engineers, make **ADINGFAVORIT** a brand used for professional purposes, and a brand which is categorized as a medium fast base for sports speed game conforming to **ITF Category 3 - Medium**.



With **ADINGFAVORIT** you get monolithic and waterproof sports ground, which is permanently and firmly glued for the substrate, with large resistance to abrasion and UV radiation, that simultaneously represents decorative and aesthetic solution in the relevant space.


WHAT IS REQUIRED FOR A CONSTRUCTION?

ADINGFAVORIT is placed on a solid **ASPHALT or REINFORCED CONCRETE** substrate, noting that before construction of **ADINGFAVORIT**, it is mandatory to perform fall/slope of the substrate. This slope should be even over the entire surface, from one end to the other or from one corner to the other. For more efficient drainage, it is best for the slope to be with shorter dimension and it should be from 0.83% (1:120) to 1% (1:100).

* Orientation NORTH - SOUTH because of the opportunity to use the pitch over the whole day without obstructions from sun rays.


Construction of the ADINGFAVORIT system on ASPHALT SUBSTRATE

This substrate is more elastic, more economical and easier to conduct, but it is not possible to bring and make asphalt everywhere. The asphalt AB 11 (AB 8) should be with thickness from at least 5 cm.

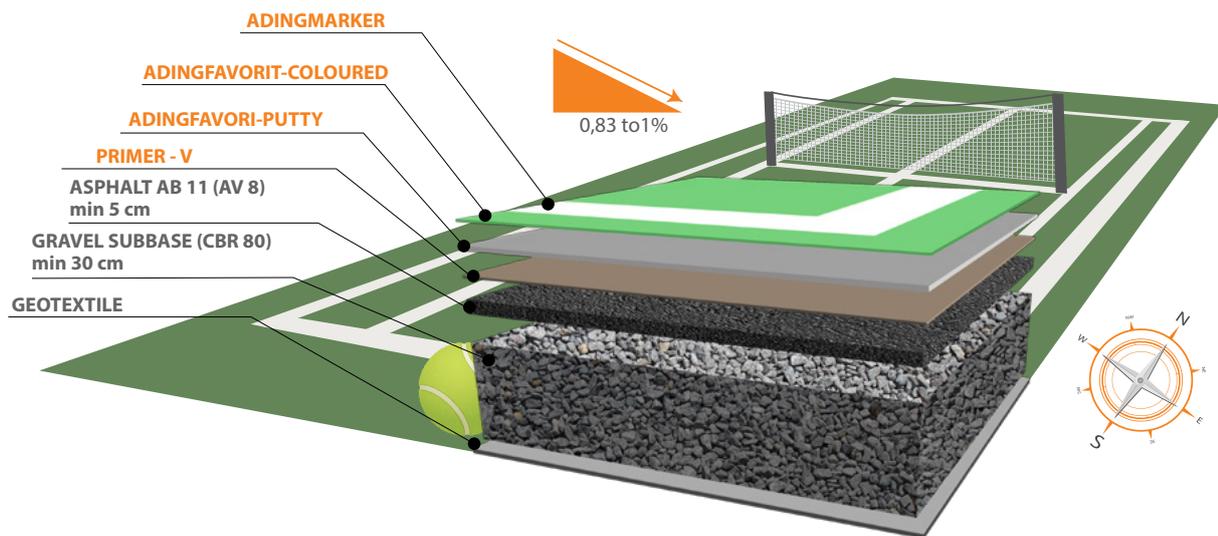

Construction of the ADINGFAVORIT SYSTEM ON REINFORCED - CONCRETE SUBSTRATE

To make this base, the reinforced concrete slab should have a strength of min. C25 / 30, it should be waterproofed and while making should be split on two working fields with dilatation joint on the place where the tennis network will be set. The concrete should be at least 28 days old before application of the **ADINGFAVORIT** system.

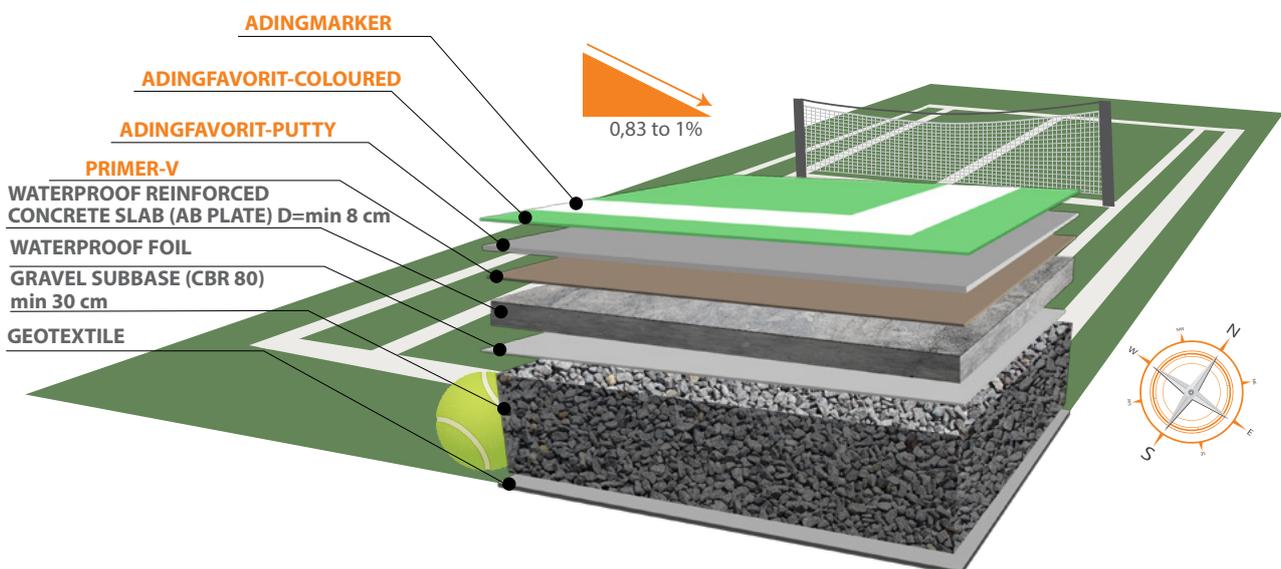

Lastly, the courts are marked with acrylic color for labelling concrete and asphalt surfaces - **ADINGMARKER**.



ADINGFAVORIT is an excellent and permanent solution for construction of floors for other sports purposes for recreational use (recreational trails, basketball, handball and football courts etc.) which is widely applied in urban environments.

COLOR CARD



GREEN



LIGHT GREEN



BLUE



LIGHT BLUE



RED



VIOLET



YELLOW




ORANGE



GREY



SAND



GRAPHITE

* Small deviations are possible due to consequences related to printing reasons