

ADING BUTYL TAPE

Self-adhesive tape for waterproofing with polyester felt for securing critical joints

FIELD OF APPLICATION

Self-adhesive tape for securing critical joints in waterproofing with Hydromal, Hydromal Flex, Hydromal Flex 1K, Addingflex and other waterproofing based on synthetic resins. The tape is placed on working joints, cracks, smaller joints for installations, joints between vertical and horizontal planes in sanitary units and kitchens. It is placed between the first and second layers of the waterproofing coating.

PROPERTIES

- Good adhesion to a wide range of surfaces;
- The product is highly conformable;
- Tape will accept paint, plaster, cement, adhesives;
- Remains flexible throughout its service life;
- Easy to use;
- Tearing resistant;
- Water repellent;

TECHNICAL FEATURES

PROPERTY	METHOD	DECLARED VALUE
Shear Adhesion strength	H 15	12 N/cm ²
Adhesion at 90°	H 48	8
Adhesion at 180°	H 41	9
Density	H 6	1,60
Vapor permeability	ISO 9932 / BS ISO 15106	0,18 g/m ² /24h/mm
Temperature stability	-	- 40 to +90 °C

METHOD FOR CONSTRUCTION





SUBSTRATE PREPARATION

The tape should be applied on a pre-dried layer of waterproofing applied on a concrete, cement mortar or plasterboard. The surface should be clean, solid, without cracks, labile parts, existing coatings, grease and dust. The temperature when applying the tire tape should be between +5°C and +40°C.

APPLICATION

The application of the tape is manually. Remove the protective film apply the tape by pressing directly onto the surface.

The application of the tape should be after 6-24 hours from the application of the first layer of the hydroisolation, depending on the temperature.

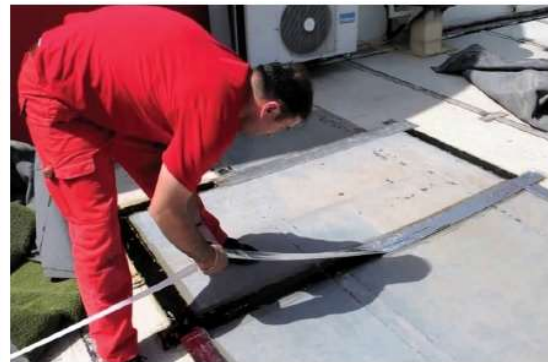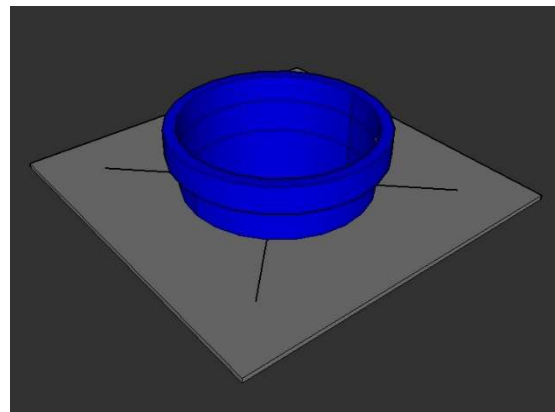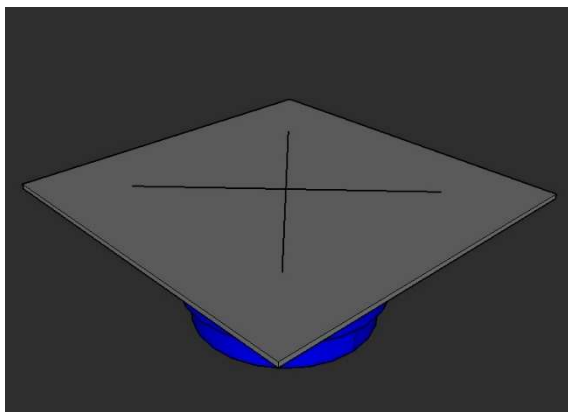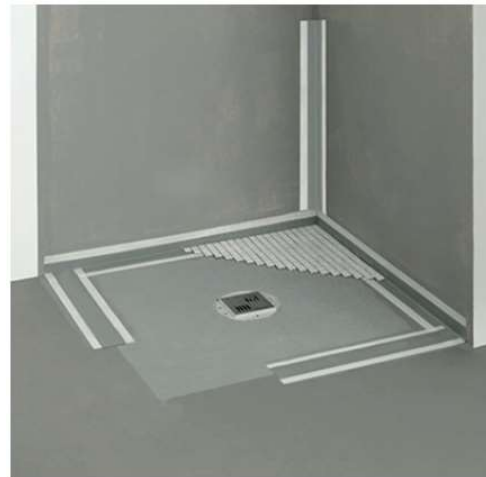

PACKING

The product is packed in rolls with protective paper, with dimensions 0.80 x 100mm and lengths of 10m and 20m.

STORAGE

In original, closed packaging, in dry and cold spaces
Shelf life: 24 months.

Health hazard: The product is not classified as dangerous according to Article 31 and Annex 2 of the EU REACH regulation. If swallowed, seek medical attention.

Protection: During application of Adding butyl tape, protection of the respiratory system is not required. Also, protective equipment for skin and hands is not required. If the product is used frequently or for a long period of time, it is necessary to wear protective gloves. After application, it is mandatory to wash hands and avoid contact with eyes.

Eye contact: In case of product contact with eyes, wash eyes with water. Seek medical attention if prolonged irritation occurs. Wash immediately with plenty of water for 15 minutes. Remove your contact lenses and open your eyes wide. Seek medical attention if discomfort occurs.

Skin contact: Wipe off and wash with soap and water. Seek medical attention if irritation occurs.

Inhalation: Move to fresh air. Seek medical attention if the discomfort persists.

The information provided in this technical prospectus is obtained from laboratory tests and experiences. The properties given are typical and are not specified. In comparison to the wide range and variations of substrates, we recommend that the product be tested by the user to determine suitability for a specific application.