

HIDROMAL FLEKS

**DVOKOMPONENTNA
ELASTIČNA HIDROIZOLACIJA
NA CEMENTNOJ OSNOVI**

Garantovano suvo




KARAKTERISTIKE:



- ✓ OMOGUĆAVA NEPOSREDNO LEPLJENJE KERAMIČKIH PLOČICA.
- ✓ NANOSI SE NA VLAŽNU PODLOGU
- ✓ ELASTIČAN, PREMOŠĆAVA MIKROPUKOTINE, NETOKSIČAN, BAKTERIOLOŠKI OTPORAN



- ✓ EKONOMIČAN, JEDNOSTAVAN ZA IZVEDBU
- ✓ POVOLJAN ZA NANOŠENJE NA PODLOGE OD: MALTERA, BETONA, GIPS-KARTONA, PRIRODNOG KAMENA, CIGLE ITN.

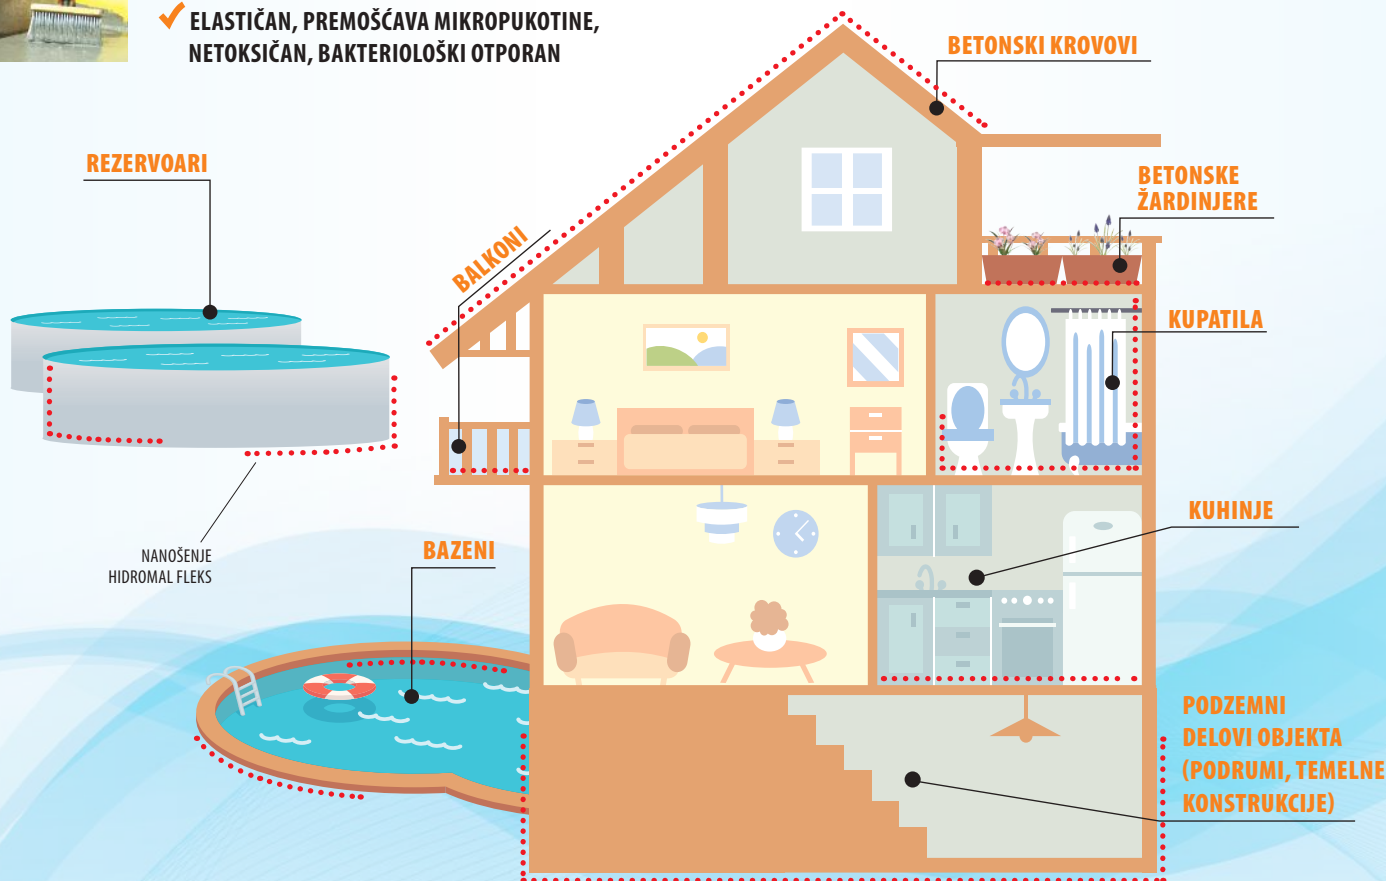

UGRAĐIVANJE:

- Nanošenje se vrši četkom ili valjkom u dva do tri sloja.
- Svaki naredni sloj se nanosi preko predhodno isušenog sloja.
- Vremensko rastojanje između nanošenja slojeva iznosi od 6 do 24 sati u zavisnosti od temperature.



OObradene površine treba da budu zaštićene od :



KIŠE




PROMAJE



MRŽNENJA

u periodu od najmanje **48** sati

POTROŠNJA:



* Za dodatne informacije, potražite tehnički prospekt proizvoda na: www.ading.com.mk

ПАКОВАНЈЕ:



10 kg
A + B komponenta


Dostupno i u velikom pakovanju od 40 kg



20 kg
B komponenta

20 kg
A komponenta

ПОДГОТОВКА




1. OTVORITI



2. SIPATI

A komponenta
u B komponenti




3. PROMEŠATI

5 min.



4. NANETI

DETALJ IZVEDBE

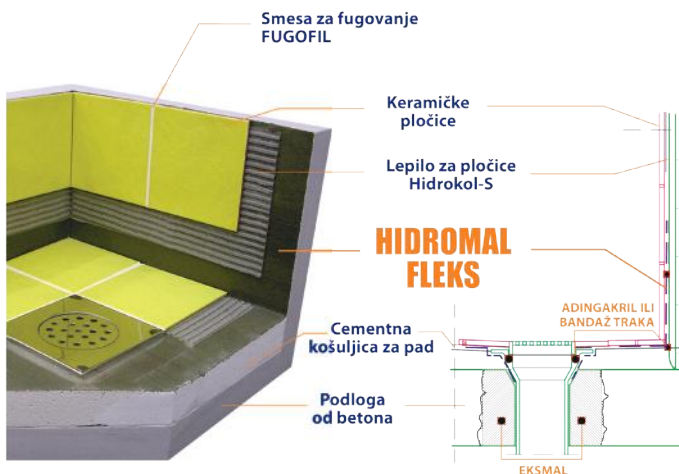

ADING AD Skopje, Novoselski Pat
(ul. 1409) br. 11, 1060 Skopje, R. Makedonija;
Tel.: +389 / 02 2034 840;
fax: +389 / 02 2034 850;
e-mail: ading@ading.com.mk
www.ading.com.mk